



– Standard Products –

Floor Standing Metal Enclosure



Sales Office: B-09-11, Gateway Corporate Suites, Gateway Kiaromas, No 1 Jalan Desa Kiara, Mont Kiara, 50480 KL.
Factory: No. 8 & 10, Jalan Meranti Jaya 7, Meranti Jaya Industrial Park, 47100 Puchong, Selangor.
Tel (mobile): +6012 208 1908; **Tel (landline):** +603 6203 3723; **email:** info@techlinedepot.com

Part Designation / Type


W E 25 20 10 - V 115 - 0 1 1 8

1 2 3 4 5 6 7 8 9 10



- 1) **Fixing Type**
W - wall-mounted
F - floor standing
- 2) **Box Type**
E - enclosure (outdoor)
D - distribution Board (indoor)
- 3) **Height**
e.g. 25 - 250mm
120 - 1200mm
220 - 2200mm
15(3) - 153mm
- 4) **Width**
e.g. 20 - 200mm
80 - 800mm
35(6) - 356mm
- 5) **Depth**
e.g. 09 - 90mm
10 - 100mm
25 - 250mm
09(3) - 93mm
10(3) - 103mm
- 6) **Box Design**
0 - not specified
V - vertical type
H - horizontal type
T - two door type
0C - MCB type
CC - MCCB type
- 7) **Box Material**
1 - metal
2 - plastic
- 8) **Material Thickness**
e.g. 00 - not specified
08 - 8mm (0.8cm)
12 - 12mm (1.2cm)
15 - 15mm (1.5cm)
- 9) **Key for Particular Model Variants**
e.g. xx - not specified
01 - 1 row
04 - 4 rows
- 10) **Key for Particular Model Variants**
e.g. xx - not specified
18 - 18 ways
30 - 30 ways
126 - 126 ways

Standard Products

(I) Floor Standing Metal Enclosure

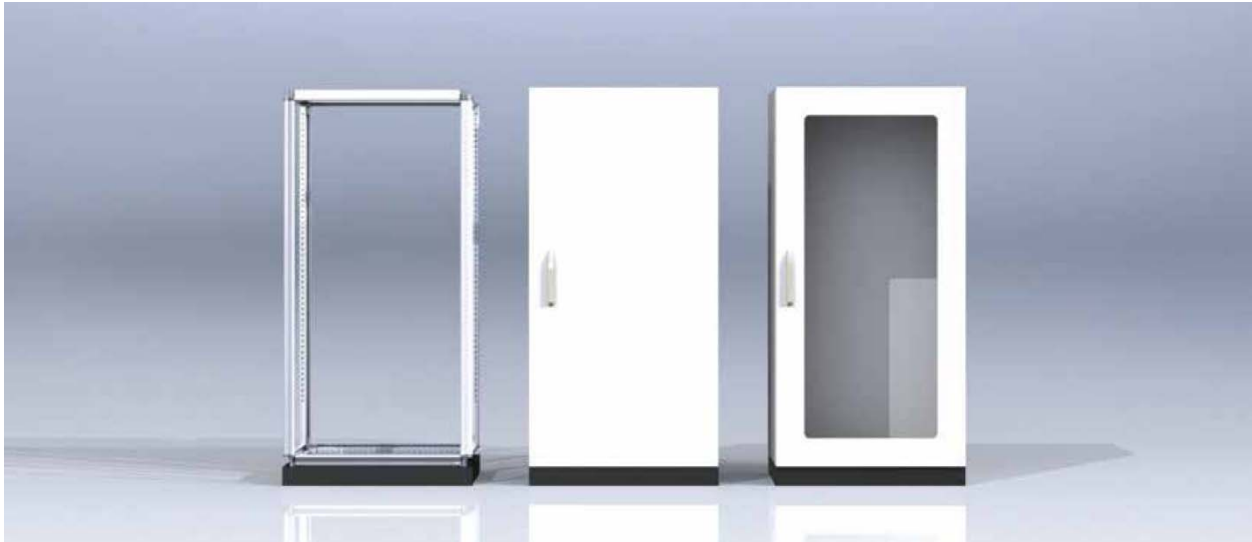

Features of Floor Standing Metal Enclosure

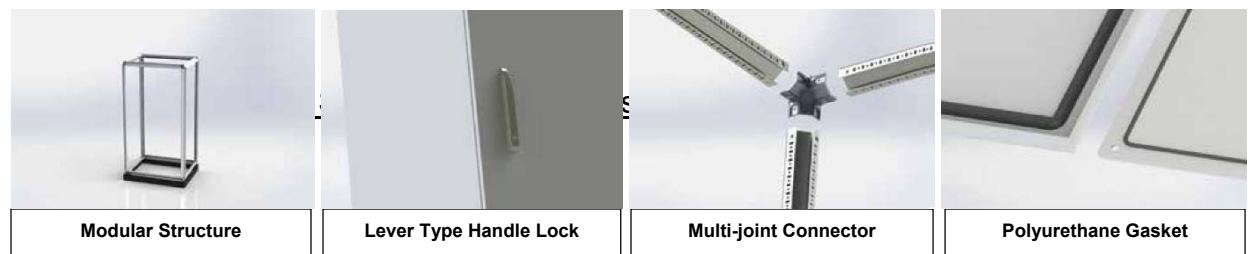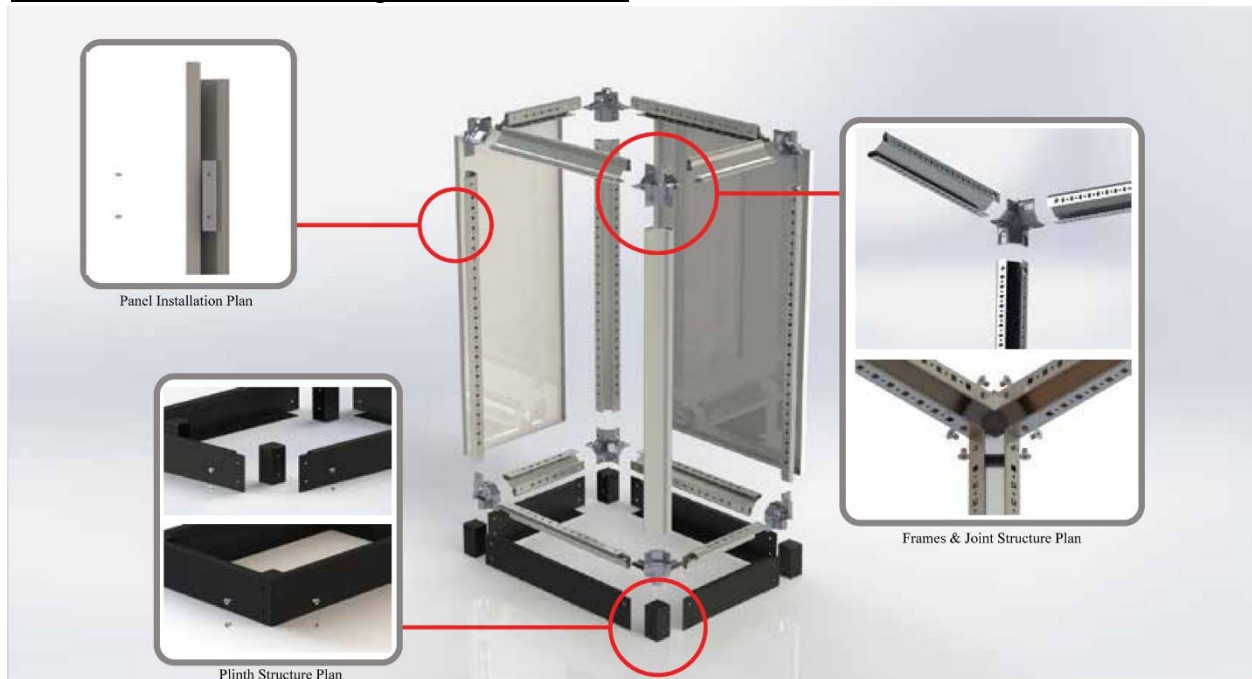

	Model	Dimension (mm) H x W x D	Mounting Plate (mm)	Bottom Gland Hole	No. of Lock	Inner Door	Rain Hood	Canopy	Plinth
1	FE1806040-0120-xxxx	1800x600x400	1716x516	✓	1	✓	✓	✓	✓
2	FE1806060-0120-xxxx	1800x600x600	1716x516	✓	1	✓	✓	✓	✓
3	FE1808040-0120-xxxx	1800x800x400	1716x716	✓	1	✓	✓	✓	✓
4	FE1808060-0120-xxxx	1800x800x600	1716x716	✓	1	✓	✓	✓	✓
5	FE1808080-0120-xxxx	1800x800x800	1716x716	✓	1	✓	✓	✓	✓
6	FE18010040-0120-xxxx	1800x1000x400	1716x916	✓	1	✓	✓	✓	✓
7	FE18010060-0120-xxxx	1800x1000x600	1716x916	✓	1	✓	✓	✓	✓
8	FE18010080-0120-xxxx	1800x1000x800	1716x916	✓	1	✓	✓	✓	✓
9	FE2006040-0120-xxxx	2000x600x400	1916x516	✓	1	✓	✓	✓	✓
10	FE2006060-0120-xxxx	2000x600x600	1916x516	✓	1	✓	✓	✓	✓
11	FE2008040-0120-xxxx	2000x800x400	1916x716	✓	1	✓	✓	✓	✓
12	FE2008060-0120-xxxx	2000x800x600	1916x716	✓	1	✓	✓	✓	✓
13	FE2008080-0120-xxxx	2000x800x800	1916x716	✓	1	✓	✓	✓	✓
14	FE20010040-0120-xxxx	2000x1000x400	1916x916	✓	1	✓	✓	✓	✓
15	FE20010060-0120-xxxx	2000x1000x600	1916x916	✓	1	✓	✓	✓	✓
16	FE20010080-0120-xxxx	2000x1000x800	1916x916	✓	1	✓	✓	✓	✓

(i) Body

- ✓ 2.0 mm Thickness Electro-Galvanized Steel

(ii) Door

- ✓ 2.0 mm Thickness Electro-Galvanized Steel
- ✓ Surface mounted with 120° opening
- ✓ Concealed removable hinges as door setting at left or right hand opening
- ✓ Sealing by polyurethane gasket

(iii) Lock

- ✓ Special custom design lock with IP rating

(iv) Mounting Plate

- ✓ 2.0 mm Galvanized Steel
- ✓ Various depth of mounting plate can be adjusted

(v) Frame

- ✓ 1.5 mm Galvanized Steel

(vi) Plinth

- ✓ 1.5mm Electro-Galvanized Steel

(vii) Protection

- ✓ QAV & TUV certified, IP55 rating with rain hood ARF is installed

(viii) Finishing

- ✓ FF160/858/CW25 texture finishing

